

Solstice™

Diffused Flexible LED Tape Light

Features

- An economical flexible light designed specifically for indirect lighting applications like under cabinets
- Soft and appealing light output with neon lighting-like illumination
- Clear silicone option available for areas where higher light output is needed
- Available in custom lengths up to 200"
- Multiple color options including white, warm white, cool white, Blue, Green, Red and Amber
- Standard IP66 rated and UV stable for installation in damp, wet or exterior locations. IP67 available upon request
- 30,000 hours of estimated life
- Decorative stainless steel or white plastic end caps available for a more finished look

Product Details

Housing Material	Diffused Silicone	Clear Silicone
Profile Dimensions	.43" H x .41" W x Various L	
Total Wattage	1.63 Watts/Ft	
Voltage	12V - 14V DC	
Current	0.12 Amp/Ft @13.6V DC	0.27 Amps/Ft @13.6V DC
Lumen Output	115 Lm/FT @ 6300k	
	100 Lm/FT @ 3000k	200 Lm/FT @ 3000k
	25 Lm/FT @ Blue	
	40 Lm/FT @ RED	
LED Color*	3000K, 3500K, 4000K, 6300K, Blue, Green, Red or Amber	
Wire Size	18 AWG	
LED Count	36 per foot	
Beam Angle	120°	
Operating Temp	0°F to +120°F (-20°C to +50°C)	
IP Rating	IP66 or IP67 (see spec guide)	
UV	UV Stable	

* Contact sales@itc-us.com for color availability

Luna Patent Numbers: 9,695,991 | 2,861,157 | 9,909,719



Specification Guide:

Part #: RRL12KK.LLLWL-10-A

Base Part #
 Voltage
 LED Color
 Light Length
 Wire Length
 Housing

Base Part #	Voltage	LED Color (KK)	Light Length (LLL)	Wire Length (WL)	Housing
RRL	12 - 12V	30 - 3000K 35 - 3500K 40 - 4000K 63 - 6300K BL - Blue GR - Green RD - Red AM - Amber	200 - 200 in. Max*	12 - 12 in. Std Length	10-A - Diffused 10K-A - Clear

IP67 Wire End Cap : 440-00335 / IP67 Finished End Cap : 440-00336


Decorative Stainless Steel End Cap : RNLL-SS-CAP

Decorative White Plastic End Cap : 810-00247 (For use in wood & fiberglass only)

*Note: Custom cuts will be cut as close to the specified length as possible, if exact length cannot be made, light will be cut to the closest cut line that is shorter than the specified length. Contact sales for info on cut lengths. Cannot be field cut.




Product Dimensions

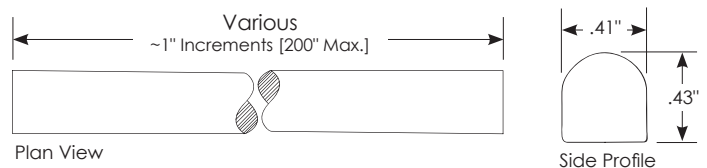

Accessory Specification


Description	Part #
Aluminum Straight Mount Track Without Tape	RNLL-1-72
Aluminum Straight Mount Track With Tape	RNLL-1T-72
Aluminum 45° Mount Track Without Tape	RNLL-2-72-CL
Aluminum 45° Mount Track With Tape	RNLL-2T-72
Black Plastic Straight Mount Track Without Tape	RBLL-2
Slotted Black Flexible Track Without Tape	RBLL-6
Black Plastic Straight Mount Track With Tape	RBLL-1
White Plastic Straight Mount Track Without Tape	RBLL10-KS
White Plastic Straight Mount Track With Tape	RBLL10-KT

*96" track available, but is subject to a UPS surcharge


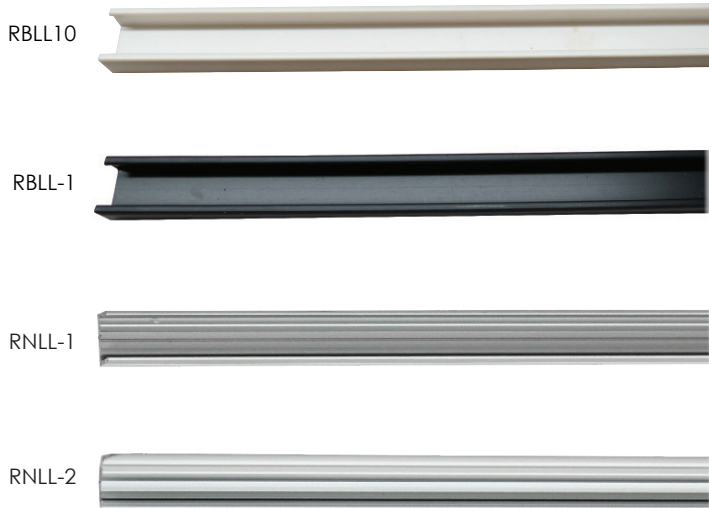


Product Dimensions



Mounting Channels:

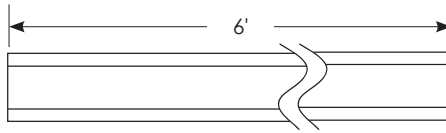

Plastic Track

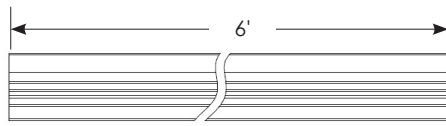

Aluminum Track (RNLL-1-72)

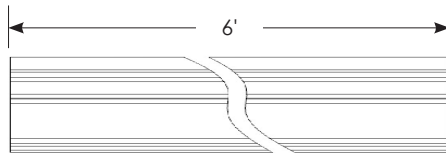

Aluminum Track (RNLL-2-72)

